


Eastsign

Laminator – Liquid

Features

- This range is applicable for adding protective coating on almost all kinds of media such as PVC banner and wallpaper.
- Solvent based or aqueous laminates are available. the purpose is to increase the outdoor durability of the inks as well as preventing the image to be scratched.
- Different mayer bar sizes are available for different laminating thicknesses.

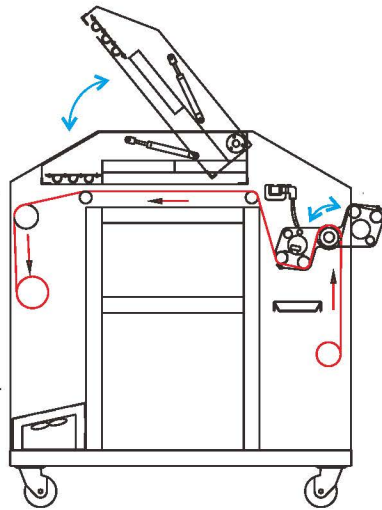

BU-1600WL
Working Width:1580mm or 62"



BU-2200WL
Working Width:2140mm or 84"

Specifications

Model	BU-1600WL	BU-2200WL	BU-3300WL
Laminating speed	1.5m/min		
Coating thickness	0.007-0.01mm		
Laminating temperature	0-150°C or 0-302°F		
Motor power	90W		
Heating power	6.5KW	7.5KW	13KW
Power supply	1 Phase/220V, 3 Phase/380V		
Roller diameter	-		
Media Rewind	Automatic, roll-to-roll		
Heating temperature	Up to 150°C/302°F		
Laminating thickness	Adjustable, depending on mayer bar		
Wastage	No wastage and scap		



Model	BU-1600WL	BU-2200WL	BU-3300WL
Machine size	2025mm x 930mm x 1050mm 80" x 37" x 42"	2630mm x 930mm x 1050mm 104" x 37" x 42"	3810mm x 1100mm x 1084mm 150" x 44" x 43"
Packing size	2150mm x 1100mm x 1230mm 85" x 44" x 49"	2750mm x 1100mm x 1230mm 108" x 44" x 49"	3980mm x 1330mm x 1310mm 157" x 53" x 52"
Machine Weight	390kg or 860lb	450kg or 992lb	810kg or 1780lb
Gross Weight	470kg or 1048lb	540kg or 1190lb	960kg or 2117lb