

Multifunction - MOT-F

For materials in roll and pieces

- ★ Transfer Printing
- ★ Direct Inks Reactivation
- ★ Lamination



Features

- 100%

100% Full Oil Drum
- 70%

70% Blanket Convergence
- 100%

Carbon Brush Slip Ring
- 70%

Blanket Auto Centering
- 100%

Analog Control Panel
- 70%

Pneumatic Tension & Pressure Control
- 100%

2m Working Table
- 70%

Biaxial Tension Bar
- 100%

3 Unwinds & 2 Rewinds
- 70%

Adjustable Transfer Pressure.
- 100%

4 Air Expansion Shafts
- 70%

Auto Power Off
- 100%

Optional Fabric Rewind
- 70%

Blanket Regulator Bolts
- 100%

High Quality Relay
- 70%


Precise Temp Control



Control Panel



Heating Relay



Slip Ring



Tensioner



Timer



Felt Auto Centering




Limit Switch

Multifunction - MOT-F



Process Diagram

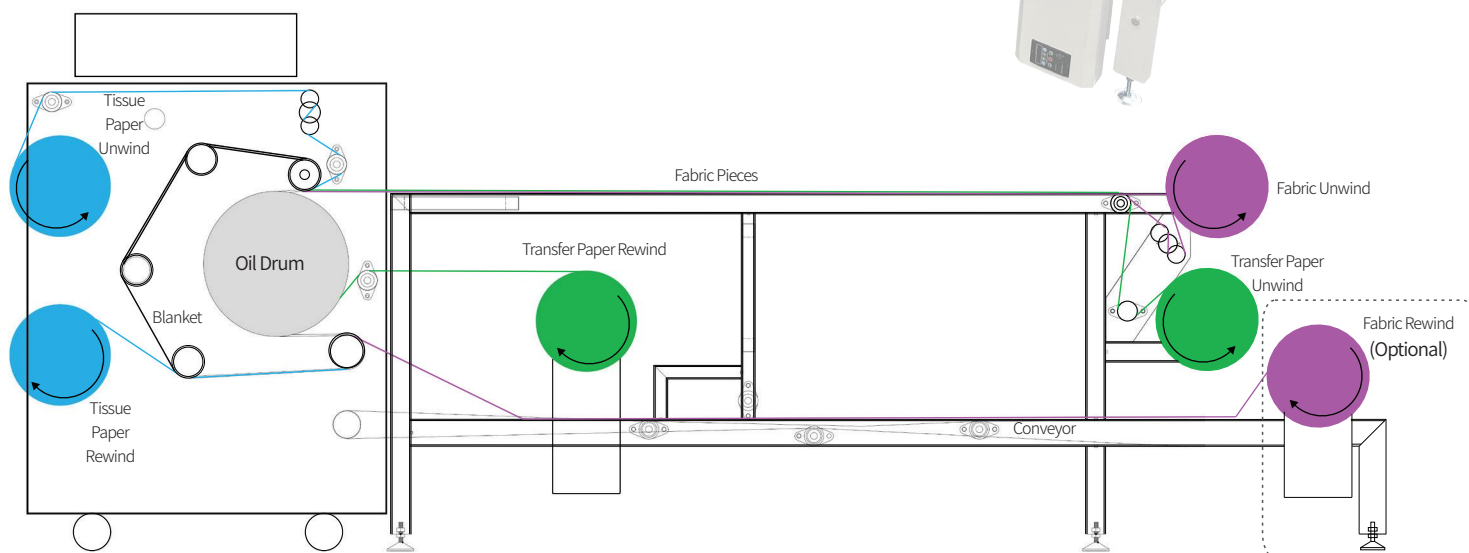

Specifications

Model	100% Full Drum Size (mm / inch)	Workable Width (mm / inch)	Rated Power (3 Phase 220V)	Max Amps (3 Phase 220V)	Rated Power (3 Phase 380V)	Max Amps (3 Phase 380V)	Linear Speed 30 Sec. Dwell (m & inch / min)	Auto Power OFF	Felt Auto Centering
MOT-1742F	420 / 16.5"	1630 / 64"	21.5KW	56A	26.5KW	40A	1.7 / 67"	☑	☑
MOT-1760F	600 / 23.6"	1630 / 64"	36.5KW	96A	45.5KW	69A	2.5 / 98"	☑	☑
MOT-1780F	800 / 31.5"	1630 / 64"	43.5KW	114A	55.5KW	84A	3.3 / 130"	☑	☑
MOT-1942F	420 / 16.5"	1800 / 71"	23.5KW	62A	28.5KW	43A	1.7 / 67"	☑	☑
MOT-1960F	600 / 23.6"	1800 / 71"	40.5KW	106A	49.5KW	75A	2.5 / 98"	☑	☑
MOT-1980F	800 / 31.5"	1800 / 71"	48.5KW	127A	60.5KW	92A	3.3 / 130"	☑	☑
MOT-2742F	420 / 16.5"	2600 / 102"	31.5KW	83A	39.5KW	60A	1.7 / 67"	☑	☑
MOT-2760F	600 / 23.6"	2600 / 102"	55.5KW	146A	68.5KW	104A	2.5 / 98"	☑	☑
MOT-2780F	800 / 31.5"	2600 / 102"	66.5KW	175A	83.5KW	127A	3.3 / 130"	☑	☑
MOT-3242F	420 / 16.5"	3200 / 126"	38KW	100A	46KW	70A	1.7 / 67"	☑	☑
MOT-3260F	600 / 23.6"	3200 / 126"	65KW	171A	80KW	122A	2.5 / 98"	☑	☑
MOT-3280F	800 / 31.5"	3200 / 126"	79KW	207A	97KW	147A	3.3 / 130"	☑	☑