


### Lanyard / Ribbon - ROT-M/S

#### ROT-M/S

- ★ Lanyard
- ★ Ribbon

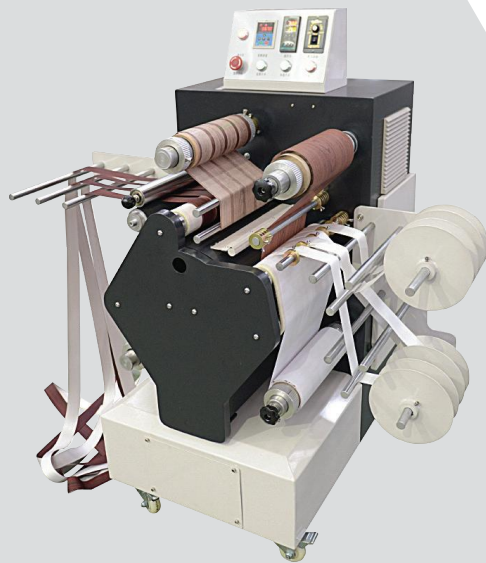


#### ROT-S Features

- 50% Full Oil Drum
- Analog Control Panel
- Maintenance Free Slip Ring
- 70% Blanket Convergence
- Adjustable Lead-In Bracket
- Touch Screen (Optional)



#### ROT-M Features

- 50% Full Oil Drum
- Analog Control Panel
- Lanyard and Ribbon only
- 4 Air Expansion Shafts
- Carbon Brush Slip Ring
- 70% Blanket Convergence
- Adjustable Lead-In Ring
- Import and Export Brackets
- Manual Tensioner



### Specifications

| Model     | 50% Full Drum Size<br>(mm / inch) | Workable Width<br>(mm / inch) | Qty of Heater | Rated Power<br>(3 Phase 220V) | Max Amps<br>(3 Phase 220V) | Rated Power<br>(3 Phase 380V) | Max Amps<br>(3 Phase 380V) | Linear Speed<br>30 Sec. Dwell<br>(m & inch / min) |
|-----------|-----------------------------------|-------------------------------|---------------|-------------------------------|----------------------------|-------------------------------|----------------------------|---------------------------------------------------|
| ROT-642M  | 420 / 16.5"                       | 500 / 20"                     | 15            | 10KW                          | 26A                        | 11KW                          | 17A                        | 1.8 / 71"                                         |
| ROT-660M  | 600 / 23.6"                       | 500 / 20"                     | 27            | 16KW                          | 42A                        | 18KW                          | 27A                        | 3.0 / 118"                                        |
| ROT-680M  | 800 / 31.5"                       | 500 / 20"                     | 33            | 19KW                          | 50A                        | 22KW                          | 33A                        | 4.0 / 157"                                        |
| ROT-942M  | 420 / 16.5"                       | 800 / 31"                     | 15            | 13KW                          | 34A                        | 16KW                          | 24A                        | 1.8 / 71"                                         |
| ROT-960M  | 600 / 23.6"                       | 800 / 31"                     | 27            | 21KW                          | 55A                        | 26KW                          | 40A                        | 3.0 / 118"                                        |
| ROT-980M  | 800 / 31.5"                       | 800 / 31"                     | 33            | 25KW                          | 66A                        | 32KW                          | 49A                        | 4.0 / 157"                                        |
| ROT-1242M | 420 / 16.5"                       | 1100 / 43"                    | 15            | 16KW                          | 42A                        | 19KW                          | 29A                        | 1.8 / 71"                                         |
| ROT-1260M | 600 / 23.6"                       | 1100 / 43"                    | 27            | 26KW                          | 68A                        | 33KW                          | 50A                        | 3.0 / 118"                                        |
| ROT-1280M | 800 / 31.5"                       | 1100 / 43"                    | 33            | 32KW                          | 84A                        | 40KW                          | 61A                        | 4.0 / 157"                                        |

| Model    | 50% Full Drum Size<br>(mm / inch) | Workable Width<br>(mm / inch) | Qty of Heater | Rated Power<br>(Single Phase 220V) | Max Amps<br>(Single Phase 220V) | Rated Power<br>(3 Phase 220V) | Max Amps<br>(3 Phase 220V) | Rated Power<br>(3 Phase 380V) | Max Amps<br>(3 Phase 380V) | Linear Speed<br>30 Sec. Dwell<br>(m & inch / min) |
|----------|-----------------------------------|-------------------------------|---------------|------------------------------------|---------------------------------|-------------------------------|----------------------------|-------------------------------|----------------------------|---------------------------------------------------|
| ROT-400S | 300 / 11.8"                       | 350 / 14"                     | 9             | 8KW                                | 36A                             | 7KW                           | 18A                        | 8KW                           | 12A                        | 1.3 / 51"                                         |

- ★ Warranty policy does not apply to Blanket and Oil Drum
- ★ Other Parts are eligible for 15 months warranty under proper use. (Starting from the time of ETD)
- ★ Specifications and external appearance are subject to change without prior notice